

CaviTrack™ - Side Mount

CS TrackSystems are an innovative range of track systems designed for a multitude of sliding doorway applications.

CS CaviTrack Side Mount is an ideal surface sliding solution where vertical fixing space is limited. This system is side fixed through the track profile. It is popular when the top of the door opening is close to the ceiling and there isn't structural support for fixture above the track.

Installation is quick and easy as the track is supplied with pre-machined fixing holes. The track also comes with a pre-finished, removable aluminum fascia and end caps that neatly conceal the top of the door, track and carriage system. The square profile of the track allows for it to be fixed to the wall with very little clearance between the ceiling drywall and the top of the track.

CaviTrack Side Mount can be upgraded to SofStop® soft close.



AVAILABLE WITH:
 SofStop® Soft Close / Soft Open

CS CaviTrack Side Mount with fascia




CS CaviTrack Side Mount with fascia

 TrackSystems

Standard Features & Options

- Available as a single track set-up only, i.e. no double or triple track versions are available.
- 304 stainless steel components available for corrosive environments.
- Track can be configured to suit Bi-Parting doors.
- Fascia may be anodized or powder coated. Standard finishes: Clear or Bronze Anodized. Inquire about custom colors.

Technical Information




- Fascia:** See Options
- Door Thickness:** 35-45mm (1-3/8" to 1-3/4"*)
- Max Door Weight:** Std: 240kg (500lb) SofStop: 120kg (264lb)
- Carriage Pack:** M6/M8/SofStop

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- 1 Heavy duty one-piece extruded aluminum track.
- 2 Pre-machined mounting holes.
- 3 Fascia is removable for future servicing requirements.
- 4 Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- 5 Large diameter wheels with precision ground bearings make for smooth running.
- 6 Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- 7 M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- 8 **CarriSnap™** quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.



Fixing Detail

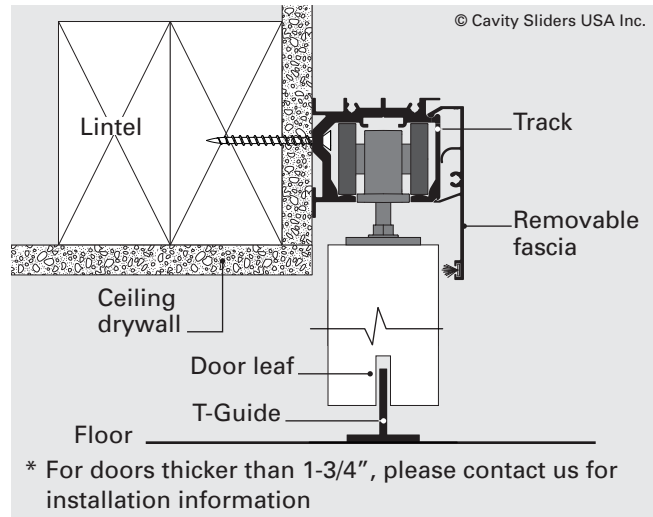

SofStop® Features & Options

- Single or Twin action (soft open/soft close) options available.
- The soft close mechanism is hidden from sight, yet remains fully serviceable.
- High quality soft close mechanism has been independently tested to 100,000 cycles.

SofStop® Single	Minimum Door Width		
	Soft Close	No stop	1 Stop
0 - 176 lb 80kg	25" (635mm)	28" (711mm)	30" (762mm)
176 - 264 lb 120kg	28" (711mm)	31" (787mm)	33" (838mm)
SofStop® Twin	No stop	1 Stop	2 Stops
0 - 176 lb 80kg	33" (840mm)	36" (914mm)	39" (990mm)

How to Order

Refer to **Carriage Packs** page for more information

- 1. Specify track length**
Available in 6', 8', 12 and 24' pre-cut lengths or can be cut down to specified length on request.
- 2. Specify door weight & width** (see options)
- 3. Specify finish**
(fascia and end caps)
- 4. Choose a carriage pack** (one per door)
- refer to **Carriage Packs** page
M6 (200lb), **M8** (500lb) or **SofStop**

