

# WallMountTrack

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS WallMountTrack** is suitable for surface sliding applications where there is enough strength in the wall to side mount a track system above an opening.

Installation is quick and easy as the track is supplied with pre-machined fixing slots. The track also comes with a pre-finished, removable aluminum fascia and end caps that neatly conceal the top of the door, track and carriage system.

The WallMount Track can be upgraded to SofStop® soft close. This is suitable for areas where quiet is required, such as bedrooms, offices and patient rooms.



**AVAILABLE WITH:**  
 SofStop® Soft Close / Soft Open

*CS WallMountTrack with clear anodized finish.*


CS WallMountTrack

 TrackSystems

## Standard Features & Options

- Available as a single track set-up only, i.e. no double or triple track versions are available.
- 304 stainless steel components available for corrosive environments.
- Track can be configured to suit Bi-Parting doors.
- Fascia may be anodized or powder coated. Standard finishes: Clear or Bronze Anodized. Inquire about custom colors.


## Technical Information



- Fascia Finish:** See Options
- Door Thickness:** 35-45mm (1-3/8" to 1-3/4"\*)
- Max Door Weight:** Std: 240kg (500lb) SofStop: 120kg (264lb)
- Carriage Pack:** M6/M8/SofStop

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- 1 Heavy duty one-piece extruded aluminum track.
- 2 Pre-machined mounting holes.
- 3 Fascia is removable for future servicing requirements.
- 4 Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- 5 Large diameter wheels with precision ground bearings make for smooth running.
- 6 Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- 7 M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- 8 **CarriSnap™** quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.

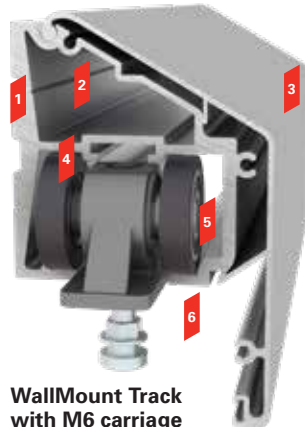


WallMount Track with M6 carriage



M8 carriage & mounting plate with stop

## Fixing Detail

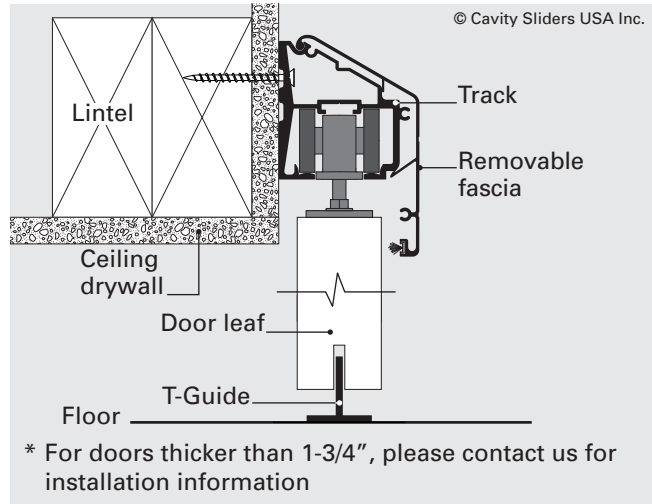

\* For doors thicker than 1-3/4", please contact us for installation information

## SofStop® Features & Options

- Single or Twin action (soft open/soft close) options available.
- The soft close mechanism is hidden from sight, yet remains fully serviceable.
- High quality soft close mechanism has been independently tested to 100,000 cycles.

SofStop® Single	Minimum Door Width		
	Soft Close	No stop	1 Stop
0 - 176 lb 80kg	25" (635mm)	28" (711mm)	30" (762mm)
176 - 264 lb 120kg	28" (711mm)	31" (787mm)	33" (838mm)
SofStop® Twin	No stop	1 Stop	2 Stops
0 - 176 lb 80kg	33" (840mm)	36" (914mm)	39" (990mm)

## How to Order

Refer to Carriage Packs page for more information

1. **Specify track length**  
Available in 6', 8', 12 and 24' pre-cut lengths or can be cut down to specified length on request.
2. **Specify door weight & width** (see options)
3. **Specify finish** (fascia and end caps)
4. **Choose a carriage pack** (one per door) - refer to Carriage Packs page  
**M6** (200lb), **M8** (500lb) or **SofStop**

